

6" Rearview Mirror Monitor

MXN6000

Owner's Manual

6" Rearview Mirror Digital LCD monitor



Features

- High Resolution 6" Digital TFT LCD Monitor
- Free Input Voltage (DC 12V ~ 30V)
- NTSC/PAL Compatibility
- 2 Camera input : 4-pin mini DIN
- Shutter camera compatible (CA1 & CA2)
- 2 Triggers function
- Built-in OSD function
- Built-in Speaker

Model : MXN6000

* Design And Specifications Are Subject To Change Without Notice.

6" Rearview Mirror Monitor

MXN6000

Owner's Manual

◆ Package Contents



Monitor



Remote Control



Camera Input cable



Instruction Manual


◆ Operation



Power ON/OFF
(Long-Key)

Switch Camera Channel
(Short-Key)

◆ Remote Control

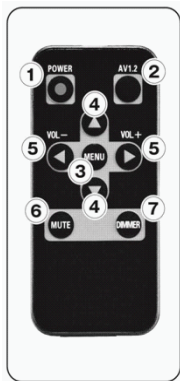

- 1. POWER**
Power ON or OFF.
- 2. AV1,2**
Switch CAMERA channel (CAM1 - CAM2 - CAM1 ...).
- 3. MENU**
Setup the function.
- 4. Δ/∇**
Select the sub-menu.
- 5. \leftarrow/\rightarrow**
Adjust the preferred settings.
- 6. MUTE**
MUTE ON
- 7. DIMMER**
Adjust the screen brightness

< How to replace remote control battery >




Battery model
CR2025

◆ Operation


◆ POWER ON/OFF




Press  button on the monitor for a while to turn the monitor ON/OFF.
Or, press POWER button on the remote control to turn the monitor ON/OFF.

◆ CAMERA CHANNEL SWITCHING



Press  button on the monitor to switch camera channel (CA1/CA2).
Or, press AV1.2 button on the remote control to switch camera channel (CA1/CA2).

◆ AUTO POWER OFF

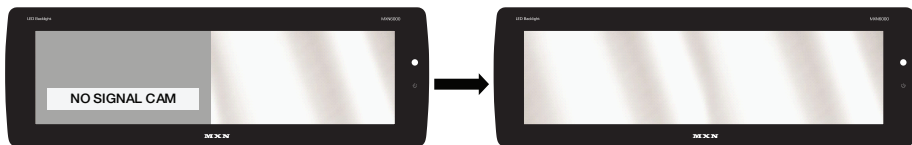

In case there is no camera input for 5 minutes, then monitor will be OFF automatically.
And, the monitor will be used as rearview mirror purpose.

◆ System Setting

◆ PICTURE



Press MENU button (1 time).

Press Δ/∇ button to select for sub-menu.

Press $\triangleleft/\triangleright$ button to adjust the preferred PICTURE of the monitor.

PICTURE	
BRIGHTNESS	50
CONTRAST	50
COLOR	50
TINT	50
SHARPNESS	50
SEL: ▲▼ ADJ: ◀▶	

BRIGHTNESS : [0 ~ 100]

- Adjust brightness level of the monitor.

CONTRAST : [0 ~ 100]

- Adjust contrast level of the monitor.

COLOR : [0 ~ 100]

- Adjust color level of the monitor.

TINT : [0 ~ 100]


- Adjust tint level of the monitor.

* TINT is available at NTSC system only.

SHARPNESS : [0 ~ 100]

- Adjust sharpness level of the monitor.

◆ FUNCTION



Press MENU button (2 times).

Press Δ/∇ button to select for sub-menu.

Press $\triangleleft/\triangleright$ button to adjust the preferred FUNCTION of the monitor.

FUNCTION	
SIDE TIMER	2.0s
SCREEN	WIDE
TRANSPARENCY	60
SYSTEM	NTSC
SEL: ▲▼ ADJ: ◀▶	

SIDE TIMER : [2.0s / 3.5s / 5.0s / 10s]

- Adjust trigger delay time for CAM2 (side view camera)

SCREEN : [WIDE / NORMAL]

- Adjust monitor screen.

TRANSPARENCY : [0 ~ 100]


- Adjust transparency of the OSD MENU table.

SYSTEM : [NTSC / PAL]

- Video system will be detected and selected automatically.

◆ System Setting


◆ PARKING GUIDE LINE



Press MENU button (3 times).

Press Δ/∇ button to select for sub-menu.

Press $\triangleleft/\triangleright$ button to adjust the preferred PARKING GUIDE LINE of the monitor.



PARKING LINE : [ON / OFF]


* Parking line function is available TRIGGER 1 (Rear trigger input) only.

LEFT GUIDE : [1 ~ 3]

- Adjust left side parking line.

RIGHT GUIDE : [1 ~ 3]

- Adjust right side parking line.



◆ DIMMER CONTROL





Press DIMMER button to adjust the brightness level of the camera picture.

6" Rearview Mirror Monitor

MXN6000

Owner's Manual

Connection

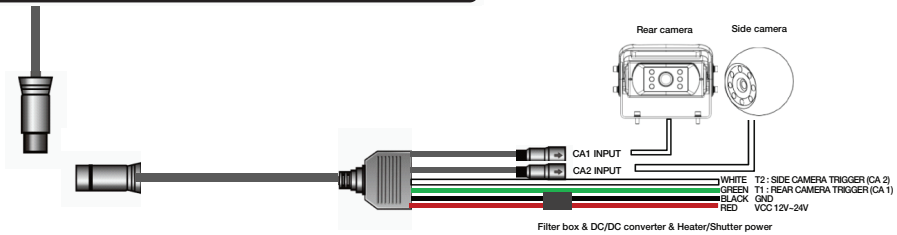

* "CA1, CA2 ARE COMPATIBLE WITH MOTORIZED SHUTTER CAMERA."


< Trigger function >

- Each trigger is activated, the concerning camera image will display on the screen.
- Trigger 1 has priority than Trigger 2.
- Trigger 2's delay time is adjustable as [2,0sec/3,5sec/5sec/10sec]

Specification

Screen Size	6 inch
Aspect Ratio	16:9 WIDE
Resolution	Digital TFT LCD 800 x 3(RGB) X 480
Video System	NTSC / PAL Compatible (Auto Detection)
Brightness	400 cd/m2
Dimmer	Manual
Power Input	DC 12V ~ 30V Input
Power Consumption	10 watt
Connector	2 Camera Inputs : 4-Pin Mini Din
Operating Temperature	0 ~ 60 ° C
Dimension	304(W) x 96(H) x 15(D)mm
Weight	About 400g
Accessories	- Camera input cable - Remote control

MEMO



Made in Korea