


FEATURES

- High resolution 1/3” Color CMOS Camera
- Compact Camera
- Mirror Image (Normal Image Selectable)
- Waterproof Housing (IP68 rating)
- Low-illumination
- Low Power Consumption
- Diagonal 145 ° viewing
- Small connector type in order to avoid drilling of big hole
- Anti-corrosive coating
- Operating temperature - 40°C ~ + 80°C
- Suitable for HORIZONTAL installation

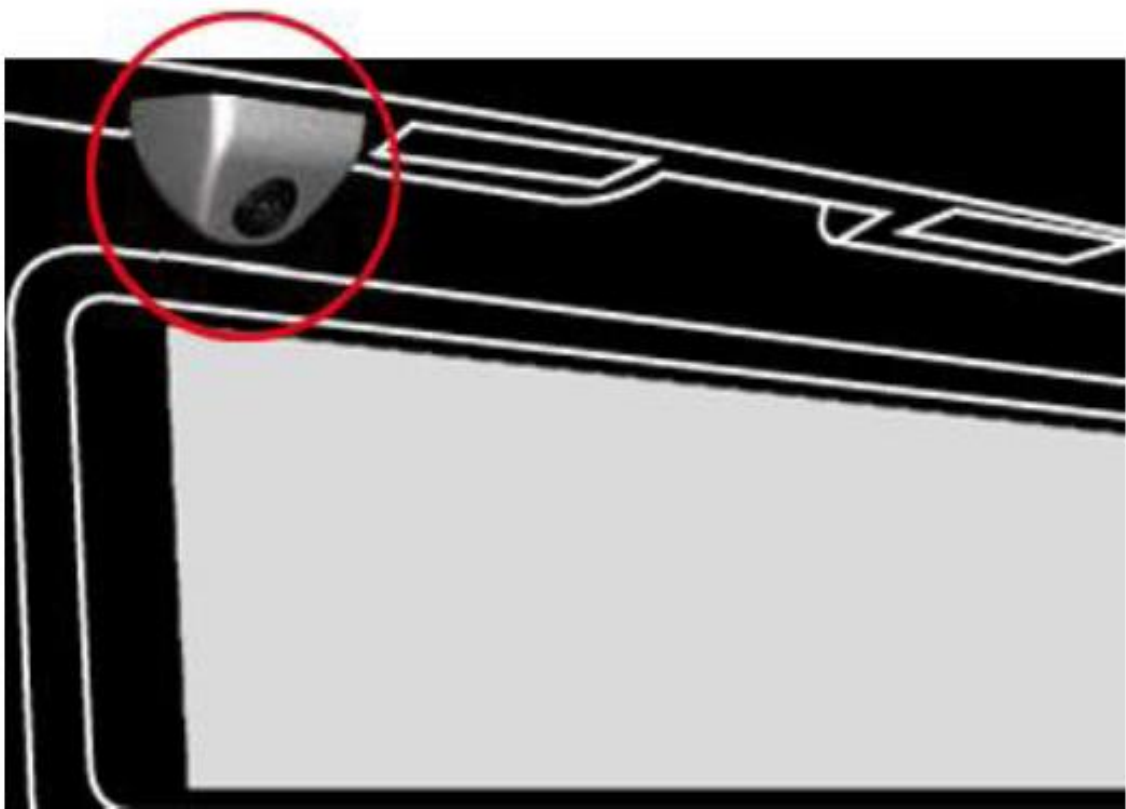


Specifications

Image sensor	1/3” High resolution Color CMOS Image Sensor	
Picture elements	PAL 410.000 pixels	
Resolution	560 TV Lines	
S/N ratio	More than 48dB	
Minimum illumination	0.1 lux	
Power range	DC 12V (5V ~ 24V)	
Power Consumption	Max. 40mA at DC 12V	
Operating Temperature	- 40°C ~ + 80°C	
Viewing Angle	145°(D) x 114°(H) x 85°(V)	
Video Output	1.0Vp-p Composite, 75 Ohms,	
Material	Aluminum Die-casting	
Housing Color	Black	
Dimension	39(D) X 26.5(L) X 20(H) mm	Gate Hole : 6Ø
Wight	Approx. 95g	

FEATURES

- High resolution 1/3” Color CMOS Camera
- Compact Camera
- Mirror Image (Normal Image Selectable)
- Waterproof Housing (IP68 rating)
- Low-illumination
- Low Power Consumption
- Diagonal 145 ° viewing
- Small connector type in order to avoid drilling of big hole
- Anti-corrosive coating
- Operating temperature - 40°C ~ + 80°C
- Suitable for VERTICAL installation

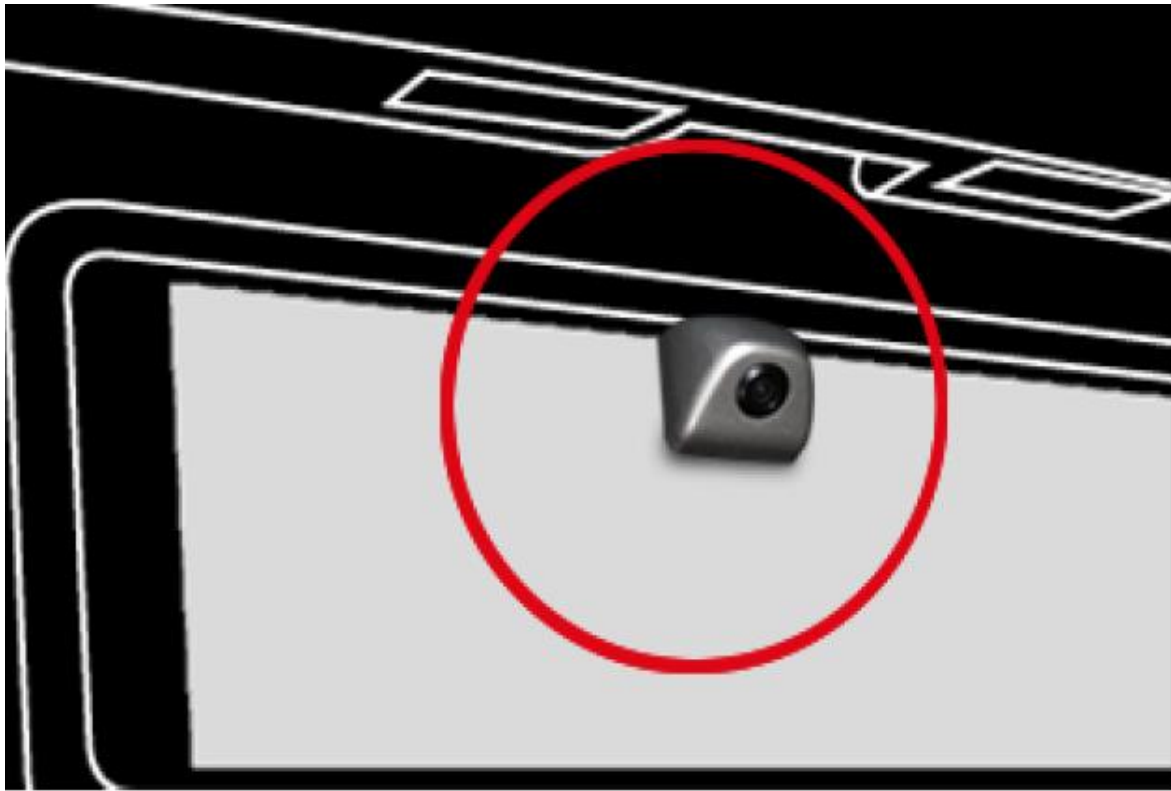

Specifications

Image sensor	1/3” High resolution Color CMOS Image Sensor	
Picture elements	PAL 410.000 pixels	
Resolution	560 TV Lines	
S/N ratio	More than 48dB	
Minimum illumination	0.1 lux	
Power range	DC 12V (5V ~ 24V)	
Power Consumption	Max. 40mA at DC 12V	
Operating Temperature	- 40°C ~ + 80°C	
Viewing Angle	145°(D) x 114°(H) x 85°(V)	
Video Output	1.0Vp-p Composite, 75 Ohms,	
Material	Aluminum Die-casting	
Housing Color	Black	
Dimension	39(D) X 26.5(L) X 20(H) mm	Gate Hole : 6Ø
Wight	Approx. 95g	