





FEATURES

- High Resolution 7" Digital TFT LCD
- Shutter camera support & camera heater support
- Water Resistant (IP67)
- 4 Camera Inputs, 4 trigger inputs
- Automatic Brightness Control
- Auto Scan function
- Auto Power ON/OFF
- NTSC/PAL Compatible
- Multi-lingual OSD control
- Tamperproof function
- Built-in Speaker
- Electronic Distance Marker (Parking line & Horizontal line)
- Free Input voltage (DC 12V ~ 30V)
- Bracket rails and Heavy Duty mounting possibility
- Speedswitch function via tacho signal (in case of frontview purpose)
- Sunvisor – included
- All connections via one multi-cable (no external controlbox)


< SPLIT MODE >

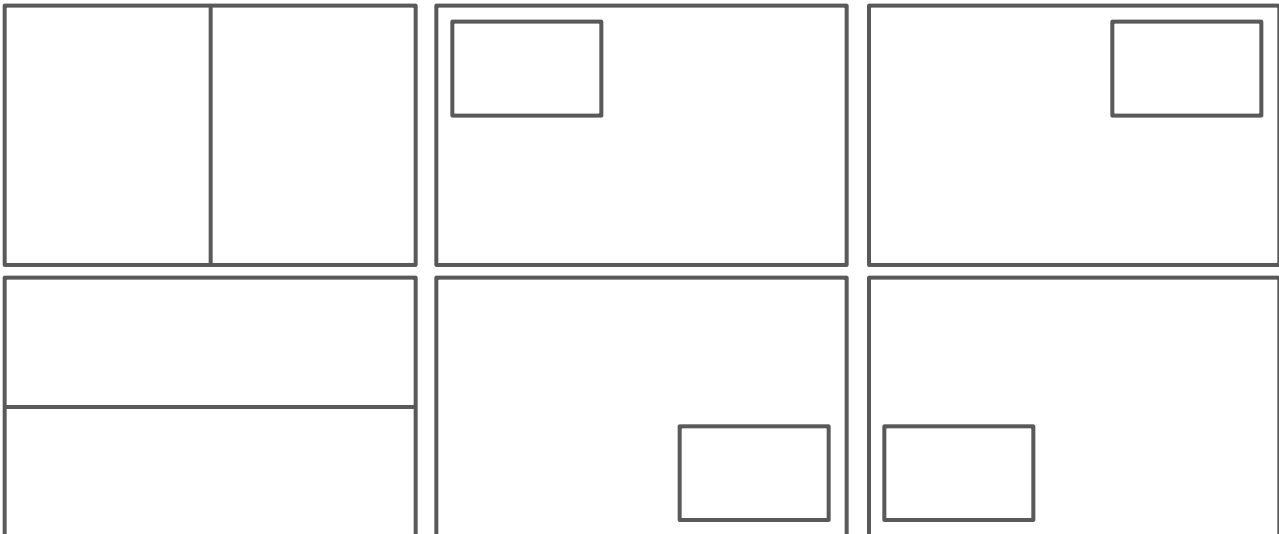

< TRIPLE MODE >

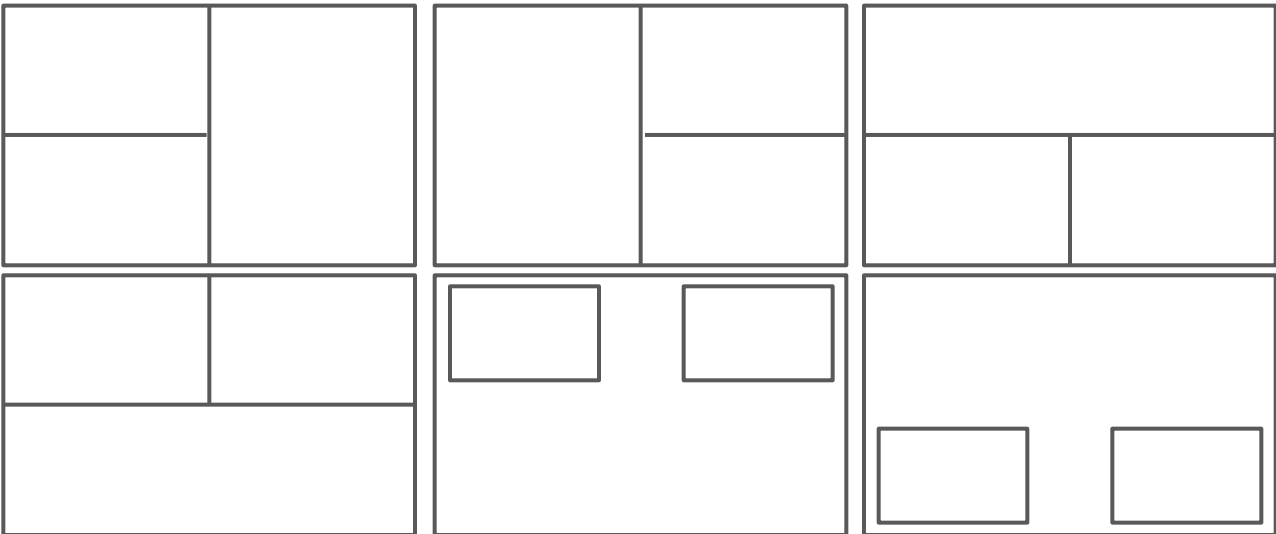

< QUAD MODE >

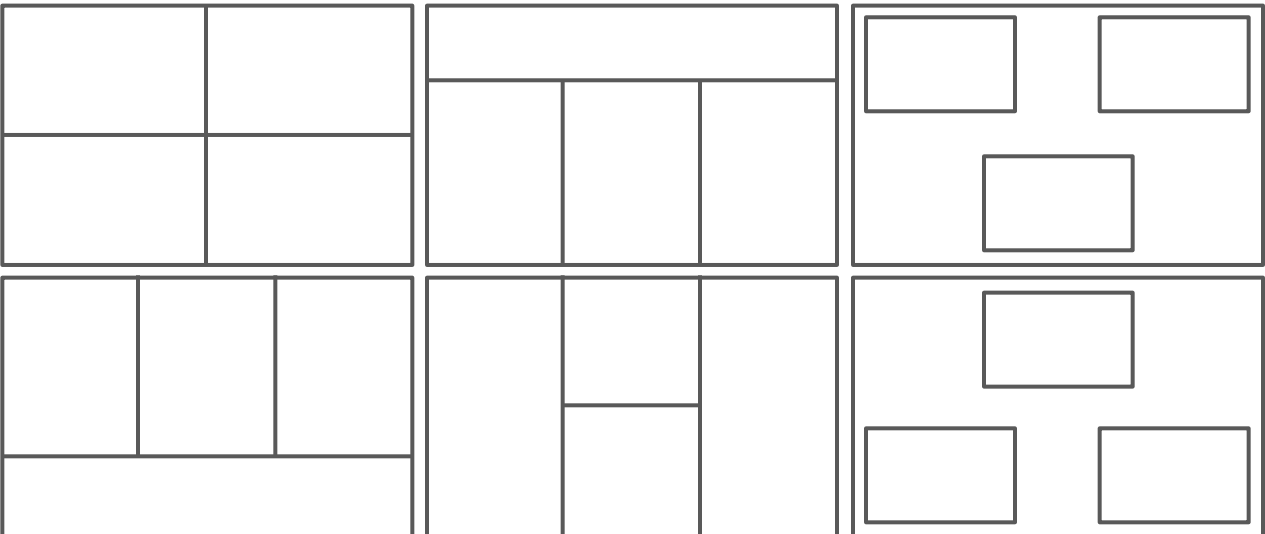

Specifications

Power input	12V~30V DC
Power Consumption	15 Watt Max.
Video System	NTSC, PAL signal Compatible
Panel	7” Digital
Resolution	800 RGB(H) X 480(V)
Format	16:9 wide
Brightness	400cd/m2
Display Mode	Single / Split / Triple / Quad / PIP
Camera Input (4CH)	Mini DIN 4P, 1Vp-p 75Ω
Operating Temperature	-25° C ~ 75° C
Storage Temperature	-30° C ~ 85° C
Dimensions	193(W) X 132(H) X 50.5(D) mm
Weight	Approx. 620g (740g with sunvisor)
O.S.D. control	Day & Night Sensor Bright, Contrast, Color, Tint Mirror/Normal image switch, Up/Down image switch, Trigger activation, Speed switch, Auto-Scan, Auto-Power, Multi-lingual OSD Factory Reset